



METAL ROOFING PANELS

SNAP LOCK PANEL

▶ DESCRIPTIONS

- Hidden fastener design provides beauty and longevity.
- Affordable standing seam option with no hand-seaming required. Slotted screw strips provide for easy installation.
- 16" wide panels with a 1" tall standing seam make Snap Lock panels the perfect choice for homeowners looking for a quality roof that lasts.

▶ SPECIFICATIONS

Installation

- Over solid decking

Material Thickness

- 26 gauge steel standard

Substrate

- Galvalume AZ-50 Sherwin Williams painted colors
- Galvalume AZ-55 acrylic coated unpainted mill finish

Coverage

- 16 inch overall coverage

Recommended Slope

- 3/12 Pitch or above

Colors



- 24 SMP painted colors and unpainted mill finish

Warranty

- 40 year warranty for Sherwin Williams painted colors
- 25 year warranty for unpainted mill finish Galvalume

Testing and Approvals

- UL 580 and UL 1897 – Uplift Resistance
- UL 2218 – Class 4 Impact Resistance
- FL32188 – Florida Approval Non-HVHZ

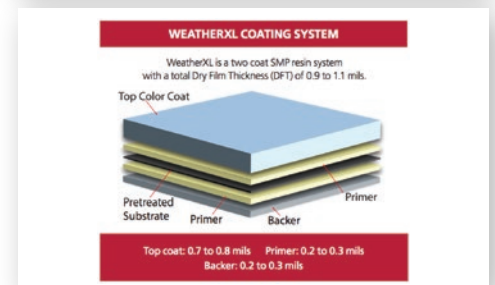

Snap Lock Panel
(26 gauge, call for color availability)

